


**Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Micro Terminal : SUT 1.5**

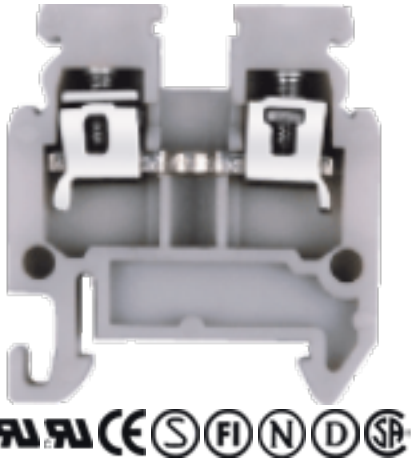

|                              |                      |
|------------------------------|----------------------|
| <b>Type of Connection</b>    | MS Screw Clamp       |
| <b>Insulating Material</b>   | Polyamide 66         |
| <b>Terminal Pitch</b>        | 5 mm ( 0.20 Inch)    |
| <b>Terminal Width</b>        | 23.5 mm ( 0.92 Inch) |
| <b>Terminal Height</b>       | 25.5 mm ( 0.99 Inch) |
| <b>Rated Cross Section</b>   | 1.5 sq mm            |
| <b>Wire Stripping Length</b> | 7 mm                 |
| <b>Screw Size</b>            | M2.6                 |

**Connection Possibility**

|                      |                 |                 |
|----------------------|-----------------|-----------------|
| <b>Stranded wire</b> | Max : 1.5 sq mm | Min : 0.5 sq mm |
| <b>Solid wire</b>    | Max : 2.5 sq mm | Min : 0.5 sq mm |

| <b>Ratings</b>    | <b>IEC</b> | <b>UL</b>                    |
|-------------------|------------|------------------------------|
| Voltage           | 320 V      | 300 V                        |
| Current           | 18 A       | 18 A                         |
| Conductor Size    | 1.5 sq mm  | Min : 24 AWG    Max : 14 AWG |
| Tightening Torque | 0.4 Nm     | 3.5 Lbln                     |

**Terminal Accessories**

|                                       |   |
|---------------------------------------|---|
| <b>End Plate</b>                      | ES2   |
| <b>End Clamp</b>                      | SCMN, SCM                                     |
| <b>Cross Connection Link Assembly</b> | CCLA1.5 - 2W                                  |
| <b>Marking Label</b>                  | LABEL KN5                                     |
| <b>Terminal Colours</b>               | GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN |
| <b>Mounting Channel</b>               | CHM10   |