
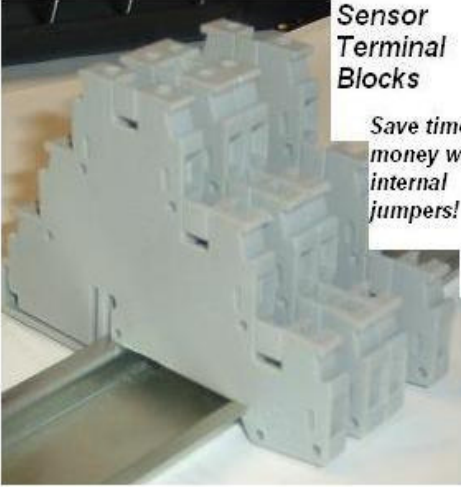


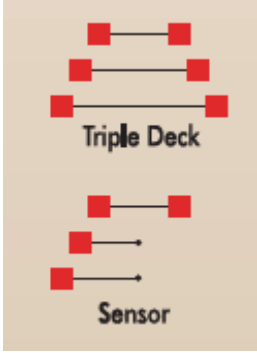



3 level terminal blocks and sensor block (ATEX approved)

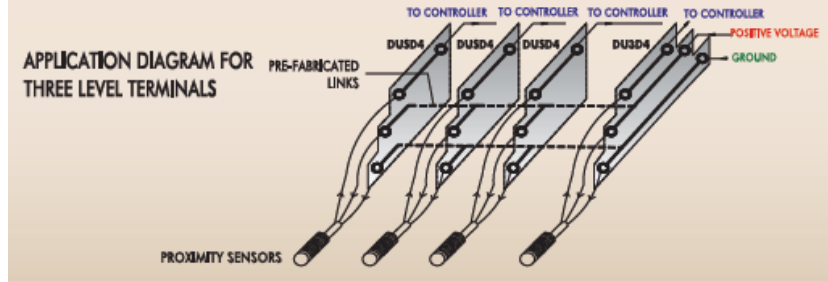

 <p>Sensor Terminal Blocks</p> <p>Save time and money with internal jumpers!</p>		Corrosion Resistant 	Corrosion Resistant 
	Ratings Part No.	12-24AWG 600V/20A	12-24AWG 600V/20A
	Gray	DU3D 4	DUSD4
	Technical data		
	Stripping length	8mm	8mm
	Screw tread/tightening torque	M3/5 Lb-in	M3/5 Lb-in
	L/W/H mm	82.3/6/55 mm	60/6/55 mm
 <p>Triple Deck</p> <p>Sensor</p>	Accessories		
	End cover	DP3D	DPSD
	Fix Bridge 2; 3; 5; 10-pole	CCLATD-2W; 3W; 4W; 5W; 10W	*Please see note below
	Labels	KN 5.5	
	End Stopper	SCKN	
 <p>APPLICATION DIAGRAM FOR THREE LEVEL TERMINALS</p>			

- DUSD4 has a special internal link attached to middle and lower level to facilitate the interconnection between adjacent terminal blocks, DU3D4 or DUSD4.

Internal Jumpers

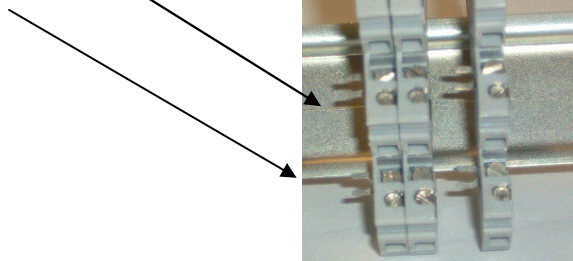

* The **DUSD4 – WL** (without internal jumper – requires CCLAD-xW external jumper)