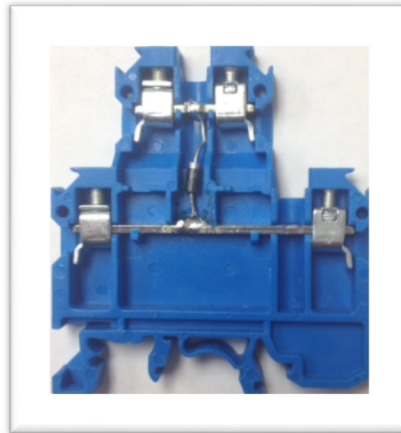


Diode Terminals (for direct voltage)

12-20 AWG



- For mounting on Din 35mm, Din 32mm and Din 15mm rails
- Insulated body of polyamide 6.6
- Snap-in labels on both sides of terminals
- Clamping unit double interlock construction; zinc plated for corrosion resistance
- Screws are harden steel; electroplated for corrosion protection
- Captive metal parts
- With diode type 1N 4007 Urrm=1000V



Dimensions:

Length across rail:	50mm (1.97 ")
Width:	6mm (0.24")
Height:	50.8mm (2")

KUDD4BL/D2

With 1 diode 1N 4007 from top to bottom	Part No.		With 1 diode 1N 4007 from bottom to top	Part No.
	KUDD4BL/D1			KUDD4BL/D2
Gray End Barrier	KPDD4			KPDD4

Clamping screws	M3
Strip insulation	9mm (0.35")
Tightening torq.	6LB-in