





Material:	Self-extinguishing PVC UL94 V0
High temperature and flame resistant up to 960°C (glow wire test)	
Max temperature for continuous use 60°C	
Standard length:	2 meters
Standard colour:	Ral 7030 gray RAL 9001 white upon request.
Halogen free in Ral 7035 light gray available only upon request	
RoHS compliant	
UL file E331386	


## TECHNICAL SPECIFICATIONS




Burr-free edges to safeguard technician's hands.




Wire retainers available only for wire duct 40mm wide and up.



Wire separator available for the 80,100,120mm wide wire duct.



Scored at the bottom of each finger for easy removal.



Scored at base for easy removal of sidewall


**WIRE DUCT 8/12/8mm SPACING**


Part Number	Width mm (in)	Height mm (in)	Meters/feet per carton
<b>A 2525</b>	25 (0.98)	25 (0.98)	100/328
<b>A 2540</b>	25 (0.98)	40 (1.57)	100/328
<b>A 2560</b>	25 (0.98)	60 (2.36)	70/230
<b>A 2580</b>	25 (0.98)	80 (3.35)	56/184
<b>A 4025</b>	40 (1.57)	25 (0.98)	80/262
<b>A 4040</b>	40 (1.57)	40 (1.57)	70/230
<b>A 4060</b>	40 (1.57)	60 (2.36)	56/184
<b>A 4080</b>	40 (1.57)	80 (3.35)	40/131
<b>A 40100</b>	40 (1.57)	100 (3.94)	32/105
<b>A 6040</b>	60 (2.36)	40 (1.57)	50/164
<b>A 6060</b>	60 (2.36)	60 (2.36)	32/105
<b>A 6080</b>	60 (2.36)	80 (3.35)	36/118
<b>A 60100</b>	60 (2.36)	100 (3.94)	24/79
<b>A 8040*</b>	80 (3.35)	40 (1.57)	40/131
<b>A 8060*</b>	80 (3.35)	60 (2.36)	28/92
<b>A 8080*</b>	80 (3.35)	80 (3.35)	30/98
<b>A 80100*</b>	80 (3.35)	100 (3.94)	24/79
<b>A 10040*</b>	100 (3.94)	40 (1.57)	28/92
<b>A 10060*</b>	100 (3.94)	60 (2.36)	20/66
<b>A 10080*</b>	100 (3.94)	80 (3.35)	24/79
<b>A 100100*</b>	100 (3.94)	100 (3.94)	16/52
<b>A 12040*</b>	120 (4.72)	40 (1.57)	24/79
<b>A 12060*</b>	120 (4.72)	60 (2.36)	20/66
<b>A 12080*</b>	120 (4.72)	80 (3.35)	16/52
<b>SES G</b>	separator	separator	50/164

Available in gray and white colour.

\* With separator.

## WIRE DUCTS

C.E.I. 23 - 22 Standards




### WIRE DUCT 4/6/4mm SPACING



Part Number	Width mm (in)	Height mm (in)	Meters/feet per carton
<b>S 2525</b>	25 (0.98)	25 (0.98)	100/328
<b>S 2540</b>	25 (0.98)	40 (1.57)	100/328
<b>S 2560</b>	25 (0.98)	60 (2.36)	70/230
<b>S 2580</b>	25 (0.98)	80 (3.35)	56/184
<b>S 4025</b>	40 (1.57)	25 (0.98)	80/262
<b>S 4040</b>	40 (1.57)	40 (1.57)	70/230
<b>S 4060</b>	40 (1.57)	60 (2.36)	56/184
<b>S 4080</b>	40 (1.57)	80 (3.35)	40/131
<b>S 40100</b>	40 (1.57)	100 (3.94)	32/105
<b>S 6040</b>	60 (2.36)	40 (1.57)	50/164
<b>S 6060</b>	60 (2.36)	60 (2.36)	32/105
<b>S 6080</b>	60 (2.36)	80 (3.35)	36/118
<b>S 60100</b>	60 (2.36)	100 (3.94)	24/79
<b>S 8040*</b>	80 (3.35)	40 (1.57)	40/131
<b>S 8060*</b>	80 (3.35)	60 (2.36)	28/92
<b>S 8080*</b>	80 (3.35)	80 (3.35)	30/98
<b>S 80100*</b>	80 (3.35)	100 (3.94)	24/79
<b>S 10040*</b>	100 (3.94)	40 (1.57)	28/92
<b>S 10060*</b>	100 (3.94)	60 (2.36)	20/66
<b>S 10080*</b>	100 (3.94)	80 (3.35)	24/79
<b>S 100100*</b>	100 (3.94)	100 (3.94)	16/52
<b>S 12040*</b>	120 (4.72)	40 (1.57)	24/79
<b>S 12060*</b>	120 (4.72)	60 (2.36)	20/66
<b>S 12080*</b>	120 (4.72)	80 (3.35)	16/52
<b>SES G</b>	separator	separator	50/164

Available in gray and white colour.  
\* With separator.

**WIRE DUCTS - 8/12/8 mm SPACING**

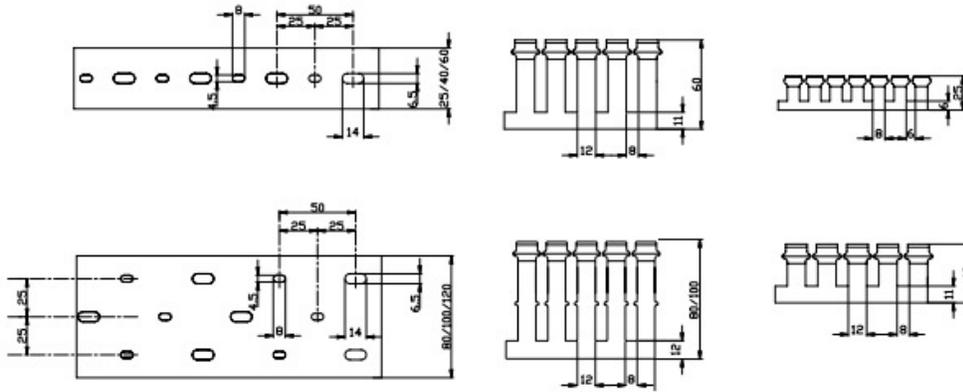

**WIRE DUCTS - 4/6/4 mm SPACING**

