

**Available From Electrotech Sales Group (ESG)****Circuit Breaker – Through the door disconnect**

Disconnect hardware used with UL 489 listed- Miniature circuit breakers.

Pictured – **B1N3C40** – 3 pole, 40 amp 240VAC Circuit breaker. This breaker offers 10 kA interrupting capacity and is suitable for branch circuit device protection.


**Note:**

**The B1N series offers** 3 pole miniature circuit breakers available up to 63 amps; 240VAC max.

**The B1H series offers** 3 pole miniature circuit breakers available up to 32 amps; 480Y/277VAC max.

**Order method for the kit (3 pole circuit breaker + disconnect hardware):**

ESG- <current> - <voltage>-CBDISC (20A, 30A, 40A, 60A,etc.)

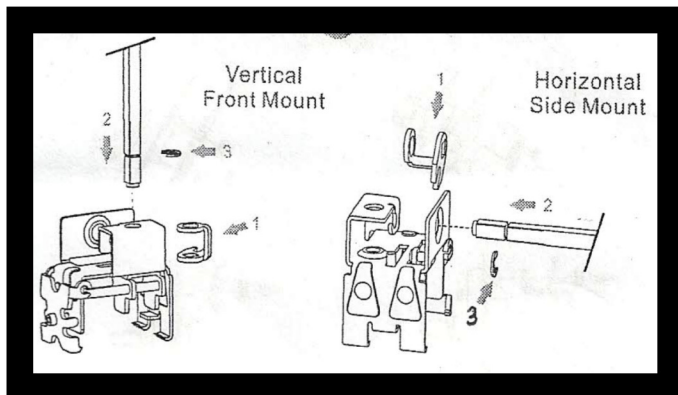

**Hardware P/N: ERH32NLD2** (ERH: Extended Rotary handle; **32**: 10" shaft length; **N**: for the UL489 Listed Circuit breaker; **LD**: Vertical front mount with door interlock; **2**: Red/Yellow handle)